
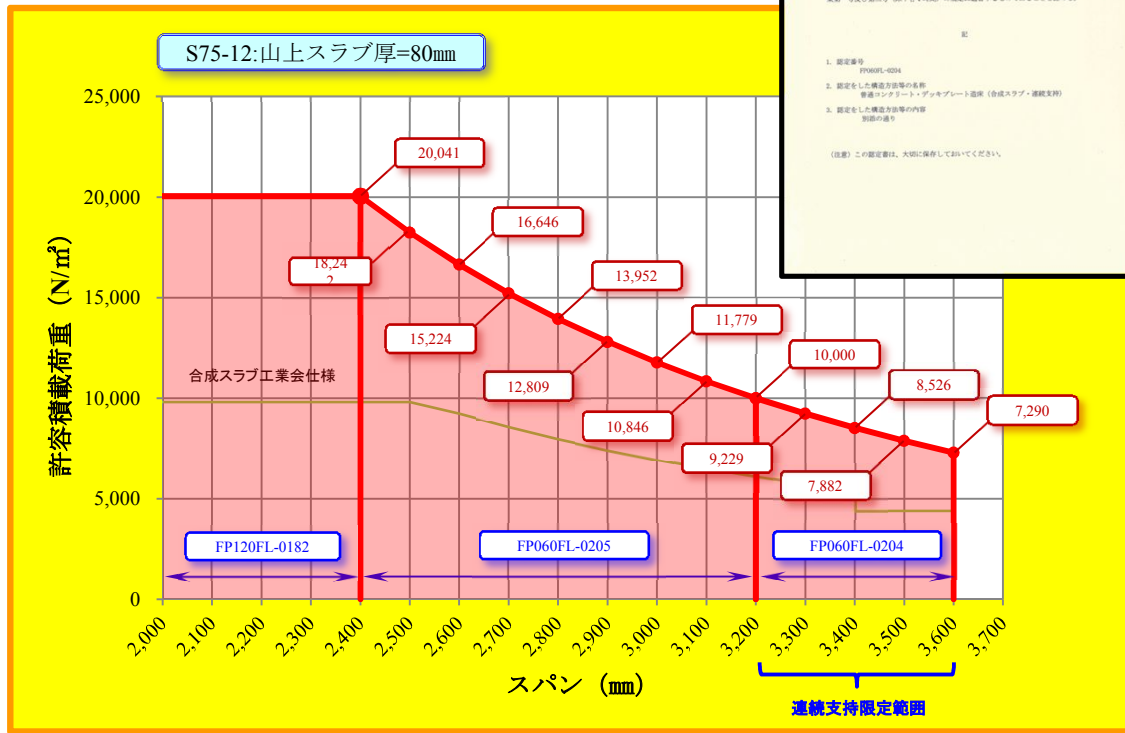


アイ・テック Sデッキ：1時間耐火仕様

認定番号:FP060FL-0204
S75-12,16(めっき)
 普通コンクリート(呼び強度=18~45N/mm²)
 溶接金網:φ6-100*100
 固定方法:頭付スタッド(中間梁上は焼抜き栓溶接可)

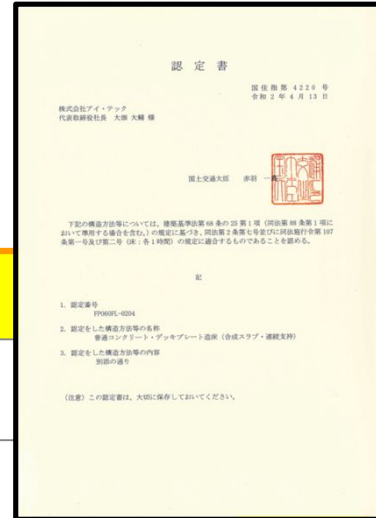

デッキ種類	S75-12			S75-16			
	80	90	100	80	90	100	
山上スラブ厚 (mm)	80	90	100	80	90	100	
認定自重 (DL)	2,910	3,150	3,390	2,950	3,190	3,430	
スパン L (mm)	2,400	20,041	19,801	19,561	20,001	19,761	19,521
	2,500	18,242	18,002	17,762	18,202	17,962	17,722
	2,600	16,646	16,406	16,166	16,606	16,366	16,126
	2,700	15,224	14,984	14,744	15,184	14,944	14,704
	2,800	13,952	13,712	13,472	13,912	13,672	13,432
	2,900	12,809	12,569	12,329	12,769	12,529	12,289
	3,000	11,779	11,539	11,299	11,739	11,499	11,259
	3,100	10,846	10,606	10,366	10,806	10,566	10,326
	3,200	10,000	9,760	9,520	9,960	9,720	9,480
	3,300	9,229	8,989	8,749	9,189	8,949	8,709
	3,400	8,526	8,286	8,046	8,486	8,246	8,006
	3,500	7,882	7,642	7,402	7,842	7,602	7,362
3,600	7,290	7,050	6,810	7,250	7,010	6,770	

※許容積載荷重 = $12,910 * (3.2/L)^2 - DL$ (単位: N/m²)

※呼び強度=設計基準強度 (Fc) + 構造体強度補正值